

VIKING™ Auto-Darkening Welding Helmets

VIKING™
WELDING HELMETS

Processes

Stick, TIG, Pulsed TIG, MIG, Pulsed MIG, Flux-Cored, Gouging, Grinding

Product Number

See pg 2 - 4 for all models

See back for complete specs

Viewing Area

1840 Series: 3.78 x 1.85 in. (96 x 47 mm)
2450 Series: 3.82 x 2.44 in. (97 x 62 mm)
3350 Series: 3.74 x 3.34 in. (95 x 85 mm)

Variable Shades

1840/2450 Series: DIN 9-13,
3350 Series: DIN 6-13

Light to Dark Switching

1/25,000 sec.

Arc Sensors

1840 Series: 2, 2450/3350 Series: 4

Light State/Grind Mode

DIN 3.5

TIG Amp Rating

1840/2450 Series: DC>3 Amp;
AC>5 Amp

3350 Series: DC> 2 Amp, AC>4 Amp

Power Supply

1840 Series: Solar Powered
w/ Battery Assist

2450/3350 Series: Solar Cells
w/ Replaceable Lithium Batteries

Rugged. Light Weight. Feature-packed.

VIKING™ solar-powered auto-darkening helmets are loaded with features, built to demanding specs and packaged with a host of accessories.

FEATURES

▶ Continuously variable control – For shade and sensitivity.

- 9-13 shade control.
 - 1840 Series External
 - 2450/3350 Series Internal
- Sensitivity – Adjustable for different welding environments.
- Delay – Adjustable from dark back to light state.

▶ Light weight –

- 1840 Black - 18 oz (510 g)
- 2450 Black - 20 oz (567 g)
- 3350 Black - 20 oz (567 g)

▶ Grind mode – Great for weld prep or post-weld clean up activities.

▶ Magnifying 'cheater' lens capable

▶ Hard hat adapter capable

▶ Bonus accessories

- Extra Cover Lenses Enclosed (2) inside and (5) outside.
- Bandana.
- Helmet Sport-Pak bag.
- Replaceable lithium battery. 2450/3350 series feature user replaceable batteries.



1840 SERIES
Tribal™
K3024-1

2450 SERIES
Street Rod™
K3035-1

3350 SERIES
3350 Patriot™
K3036-1

2
YEAR WARRANTY
PARTS AND LABOR
AÑOS DE GARANTÍA
PARTES Y MANO DE OBRA
ANS DE GARANTIE
PIECES ET MAIN D'OEUVRE



Solar Powered



1840 SERIES



1840 Black
K3023-1



Tribal™
K3024-1



Cruzin Sticks™
K3025-1



1840 Patriot™
K3026-1




Amp Angel™
K3027-1



Amp Angel™

Design intended specifically for female welders.

110 X 90 mm (4.33 X 3.54 in.) CARTRIDGE



Two Independent Arc Sensors – Helps avoid blind spots that prevent auto-darkening.

Solar-Powered – With battery assist. No on/off switch to remember.

External Wired Variable Shade Control – For shade 9-13.

External Grind Mode – Use helmet as a grinding shield.

18 40 Series –

40 designates 90 x 110 mm cartridge compatible shell.
1.85 in. height of viewing area.



Continuously Variable Delay – 0.1 – 1.0 sec.

Continuously Variable Sensitivity – For use in different ambient light welding environments.

Substantial View Size – 96 x 47 mm, 3.78 x 1.85 in.

Magnifying 'Cheater' Lens Capable – Easy to add Lincoln Electric lenses. See back page for details.

Top Quality LCD Optics – Deliver a clear, natural view.

Meets ANSI, CAN/CSA and CE Requirements – 3rd party testing of cartridge design.

2450 SERIES



2450 Black
K3028-1



Heavy Metal™
K3029-1



Street Rod™
K3035-1



2450 Patriot™
K3032-1



Thor™
K3040-1




Captain America™
K3041-1



Hemisfear™
K3030-1



4.50 X 5.25 in. (114 X 133 mm) CARTRIDGE



Solar-Powered – With user replaceable batteries. Two CR2450 lithium batteries required (included with helmet). No on/off switch to remember.

Rigid Protective Cartridge Frame Holder – Securely locks cartridge into place (not shown).

Four Independent Arc Sensors – Helps avoid blind spots that prevent auto-darkening.

24 50 Series –

- 50 designates 4.50 x 5.25 in. cartridge compatible shell.
- 2.44 in. height of viewing area.



Low Battery Indicator Light

Continuously Variable Delay – 0.1 – 1.0 sec.

Internal Variable Shade Control – For shade 9-13.

Continuously Variable Sensitivity – For use in different ambient light welding environments.

Internal Grind Mode – Use helmet as a grinding shield.

Substantial View Size – 97 x 62 mm, 3.82 x 2.44 in.

Magnifying 'Cheater' Lens Capable – Easy to add Lincoln Electric lenses. See back page for details.

Top Quality LCD Optics – Deliver a clear, natural view.

Meets ANSI, CAN/CSA and CE Requirements – 3rd party testing of cartridge design.

Battery Compartments (CR 2450 lithium batteries required Qty – 2)

3350 SERIES



3350 Black
K3034-1



3350 Patriot™
K3036-1



3350 Tribal™
K3074-1



Motorhead™
K3100-1




3350 Terracuda™
K3039-1



New Terracuda™

4.50 X 5.25 in. (133 X 114 mm) CARTRIDGE




Rigid Protective Cartridge Frame Holder – Securely locks cartridge into place (not shown).

Four Independent Arc Sensors – Helps avoid blind spots that prevent auto-darkening.

33 50 Series –

- 50 designates 4.50 x 5.25 in. cartridge compatible shell.
- 3.34 in. height of viewing area.

Solar-Powered – With user replaceable batteries. One CR2450 lithium battery required (included with helmet). No on/off switch to remember.

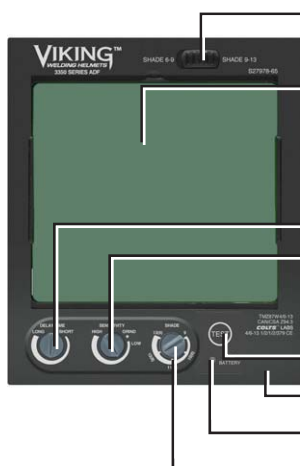

Shade Range Switch – Toggle between 6-9 or 9-13.

Substantial View Size – 95 x 85 mm, 3.74 x 3.34 in.

Magnifying 'Cheater' Lens Capable – Easy to add Lincoln Electric lenses. See back page for details.

Top Quality LCD Optics – Deliver a clear, natural view.

Meets ANSI, CAN/CSA and CE Requirements – 3rd party testing of cartridge design.

Continuously Variable Delay – 0.1 – 1.0 sec.

Continuously Variable Sensitivity – For use in different ambient light welding environments.

Internal Grind Mode – Use helmet as a grinding shield.

Battery/Shade Test Control – Pre-test helmet shade before welding.

Battery Compartment (CR 2450 lithium batteries required Qty – 1)

Low Battery Indicator Light

Internal Variable Shade Control – For shade 6-9 or 9-13 based on shade range selected.

SHARED FEATURES



Lightweight, Full Coverage Shell

- Sheds spatter and resists impact. Meets ANSI Z87.1, CAN/CSA Z94.3 and CE certification.



Magnifying 'Cheater' Lens Capable

- For weld puddle clarity.



Headgear

- Secure up stop keeps helmet up when not welding.
- Fore/Aft adjustment for distance from face.
- Soft absorbent sweat band.




Hard Hat Adapter Capable

- For most hard hat models.
- Order KP3047-1.

GREAT BONUS ITEMS!



1840 Series Sport-Pak helmet bag includes Tribal™ bandana.

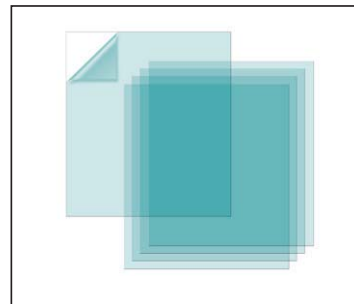


Extra Cover Lenses Enclosed

- Inside lens – QTY 2
- Outside lens – QTY 5



2450 and 3350 Series Sport-Pak helmet bag includes Foose® bandana.



In addition to a Sport-Pak, the 1840 Black, 2450 and 3350 Black Series helmets include a decal sheet. Design your own helmet!

REPLACEMENT PARTS

Sales Number	Description	Dimensions	Package Qty.	Works With				
				1840 Series	2450 Series	3350 Series	700G Series	750S Series
KP2853-1	700G/1840 ADF CARTRIDGE	DINS 110 X 90	1	•			•	
KP2932-1	2450 SERIES ADF CARTRIDGE	STD 4 X 5	1		•			
KP3045-1	3350 SERIES ADF CARTRIDGE	STD 4 X 5	1			•		
KP2899-1	750S SERIES ADF CARTRIDGE	STD 4 X 5	1					•
KP2897-1	INSIDE CLEAR COVER LENS	96 x 51.6 x 1.0 mm (3.78 x 2.03 x .04 in.)	5	•			•	•
KP2898-1	OUTSIDE CLEAR COVER LENS	114 x 133 x 1.0 mm (4.5 x 5.25 x .04 in.)	5		•	•		•
KP2913-1	OUTSIDE CLEAR COVER LENS	112 x 91.3 x 1.5mm (4.41 x 3.59 x .06 in.)	5				•	
KP2931-1	INSIDE CLEAR COVER LENS	98.5 x 66.5 x 1.0mm (3.88 x 2.62 x .04 in.)	5		•			
KP3043-1	OUTSIDE CLEAR COVER LENS	114 x 100 x 1.5 mm (4.5 x 3.94 x .06 in.)	5	•				
KP3044-1	3350 INSIDE CLEAR COVER LENS	94.7 x 89.7 x 1.0 mm (3.73 x 3.53 x .04 in.)	5			•		
KP3046-100	CHEATER LENS 1.00 MAG	2 X 4.25 FRAME, 1.0 MAG	1	•	•	•	•	
KP3046-125	CHEATER LENS 1.25 MAG	2 X 4.25 FRAME, 1.25 MAG	1	•	•	•	•	
KP3046-150	CHEATER LENS 1.50 MAG	2 X 4.25 FRAME, 1.5 MAG	1	•	•	•	•	
KP3046-175	CHEATER LENS 1.75 MAG	2 X 4.25 FRAME, 1.75 MAG	1	•	•	•	•	
KP3046-200	CHEATER LENS 2.00 MAG	2 X 4.25 FRAME, 2.0 MAG	1	•	•	•	•	
KP3046-225	CHEATER LENS 2.25 MAG	2 X 4.25 FRAME, 2.25 MAG	1	•	•	•	•	
KP3046-250	CHEATER LENS 2.50 MAG	2 X 4.25 FRAME, 2.5 MAG	1	•	•	•	•	
KP2930-1	SWEATBAND	N/A	2	•	•	•	•	•
KP2854-1	SWEATBAND	N/A	2				•	•
KP2929-1	HEADGEAR W/SWEATBAND	N/A	1	•	•	•		
KP2851-1	HEADGEAR W/SWEATBAND	N/A	1				•	•
KP3047-1	HARD HAT ADAPTER	N/A	1	•	•	•		

PRODUCT SPECIFICATIONS

Series	Lens Switching Speed (sec)	Variable Shade/Control	Magnifying "Cheater" Capable Lens	Grind Mode Shade/Control	Light Sensitivity Control	Delay Control Dark to Light (sec)	Arc Sensors	TIG Amp Rating	Cartridge Size in. (mm)	View Size in. (mm)	Temperature Range	Weight oz. (g)
VIKING™ 1840	1/25,000	9-13 / External	Yes	3.5 / External	Continuous	0.1 - 1.0 Fully Adjustable	2	DC > 3 Amp AC > 5 Amp	DINS 4.33 x 3.54 (110 x 90)	3.78 x 1.85 (96 x 47)	Operating: -10°C - +55°C (14°F - 131°F) Storage: -20°C - +70°C (-4°F - 158°F)	18 (510)
VIKING™ 2450		9-13 / Internal		3.5 / Internal			4		US 5.25 x 4.50 (133 x 114)	3.82 x 2.44 (97 x 62)		20 (567)
VIKING™ 3350		6-13 Internal						DC > 2 Amp AC > 4 Amp		3.74 x 3.34 (95 x 85)		20 (567)



Thor and Captain America, along with distinctive likeness(es) thereof are Trademarks of Marvel Characters, LLC and are used with permission. This helmet is produced under license from Marvel Characters LLC. Copyright © 2011, Marvel Characters, Inc. All rights reserved. www.marvel.com



Foos, Chip Foos, Foos Design and the Chip Foos signature are registered trademarks of Foos Design Inc. and are used with permission. This helmet is produced under license from Foos Design, Inc. All rights reserved. www.foosdesign.com

www.lincolnelectric.com/helmets

CUSTOMER ASSISTANCE POLICY

The business of The Lincoln Electric Company is manufacturing and selling high quality welding equipment, consumables, and cutting equipment. Our challenge is to meet the needs of our customers and to exceed their expectations. On occasion, purchasers may ask Lincoln Electric for information or advice about their use of our products. Our employees respond to inquiries to the best of their ability based on information provided to them by the customers and the knowledge they may have concerning the application. Our employees, however, are not in a position to verify the information provided or to evaluate the engineering requirements for the particular weldment. Accordingly, Lincoln Electric does not warrant or guarantee or assume any liability with respect to such information or advice. Moreover, the provision of such information or advice does not create, expand, or alter any warranty on our products. Any express or implied warranty that might arise from the information or advice, including any implied warranty of merchantability or any warranty of fitness for any customers' particular purpose is specifically disclaimed.

Lincoln Electric is a responsive manufacturer, but the selection and use of specific products sold by Lincoln Electric is solely within the control of, and remains the sole responsibility of the customer. Many variables beyond the control of Lincoln Electric affect the results obtained in applying these types of fabrication methods and service requirements.

Subject to Change – This information is accurate to the best of our knowledge at the time of printing. Please refer to www.lincolnelectric.com for any updated information.

